



# VACUUM SEALER 600 MM

The WHS-B-S600E is a heavy-duty vacuum sealer designed for industrial and food packaging applications requiring precision and scalability. Featuring a 600 mm Double Hot Wire sealing bar, with working stage, robust stainless-steel construction, and vacuum generation via compressed air, it ensures airtight protection for moisture-sensitive products during storage or transit.

## KEY FEATURES AND BENEFITS

### Precision and durability

- Advanced HMI panel ensures precise sealing.
- Stainless steel construction for lasting performance.
- Double Hot Wire sealing bar for consistent, high-strength seals.
- Open housing design enhances heat dissipation for cooler, longer-lasting operation.

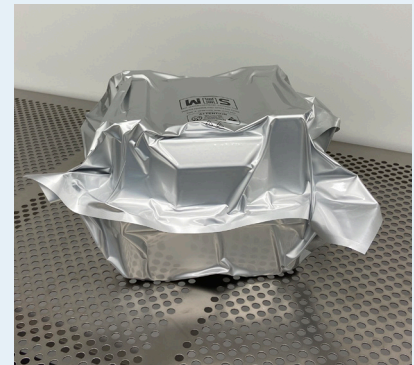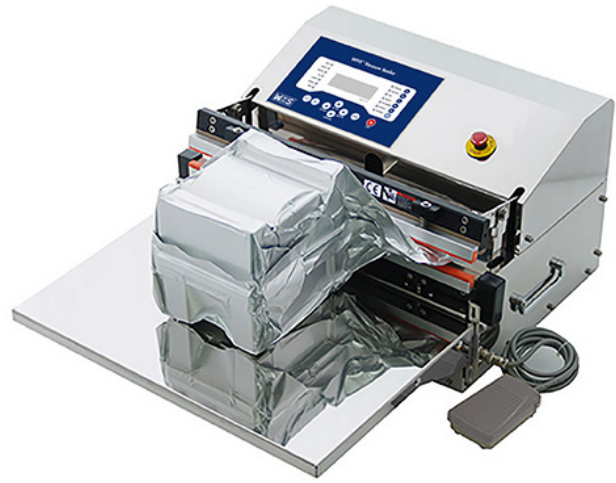

WHS-B Moisture Barrier Bags

### Operator convenience

- Multiple cycle modes (M1-M5) and specific modes for sealing (S) or vacuum-sealing (V).
- LCD displays real-time vacuum levels.
- Foot pedal allows hands-free bag positioning.

### Safety and maintenance

- Key lock prevents unauthorized adjustments.
- Nozzle retracts after 60 seconds of inactivity.
- Sealing bar lifts 2 seconds after sealing.
- Safety sensor detects obstructions and lifts the bar immediately.
- Circuit-protection fuses prevent electrical overloads.
- Real-time diagnostics for quick troubleshooting.

### WHY CHOOSE THE WHS-B-S600E?


The WHS-B-S600E stands out for its exceptional reliability, user-friendliness, and precision. Its Double Hot Wire sealing bar and compressed-air-driven ejector system ensure secure vacuum sealing of moisture barrier bags, protecting your products from contamination. With advanced features and industrial-grade construction, it is a trusted choice for high-quality sealing results.

# VACUUM SEALER 600 MM

ITEM	SPECIFICATIONS
Construction material	Stainless Steel
Weight	33 kg
Sealing length	600 mm
Sealing width	5 mm or 10 mm
Vacuum	Ejector system (compressed air)
Max vacuum strength	Up to 80 kPa
Vacuum control	Adjustable by vacuum level (kPa) or time (seconds)
Gas flushing	Timer-controlled for precise gas replacement
Compressed Air	5–7 kgf/cm <sup>2</sup> (required)
Power supply	1-phase, 110/220 V, 50/60 Hz
Cleanroom designation	ISO 5 (Class 100 FS209E)

## ORDERING INFORMATION

WHS-B-	S600E
CODE	MODEL
S600E	Vacuum sealer 600 mm incl. working stage, gas flushing function and double hot wire sealing bar

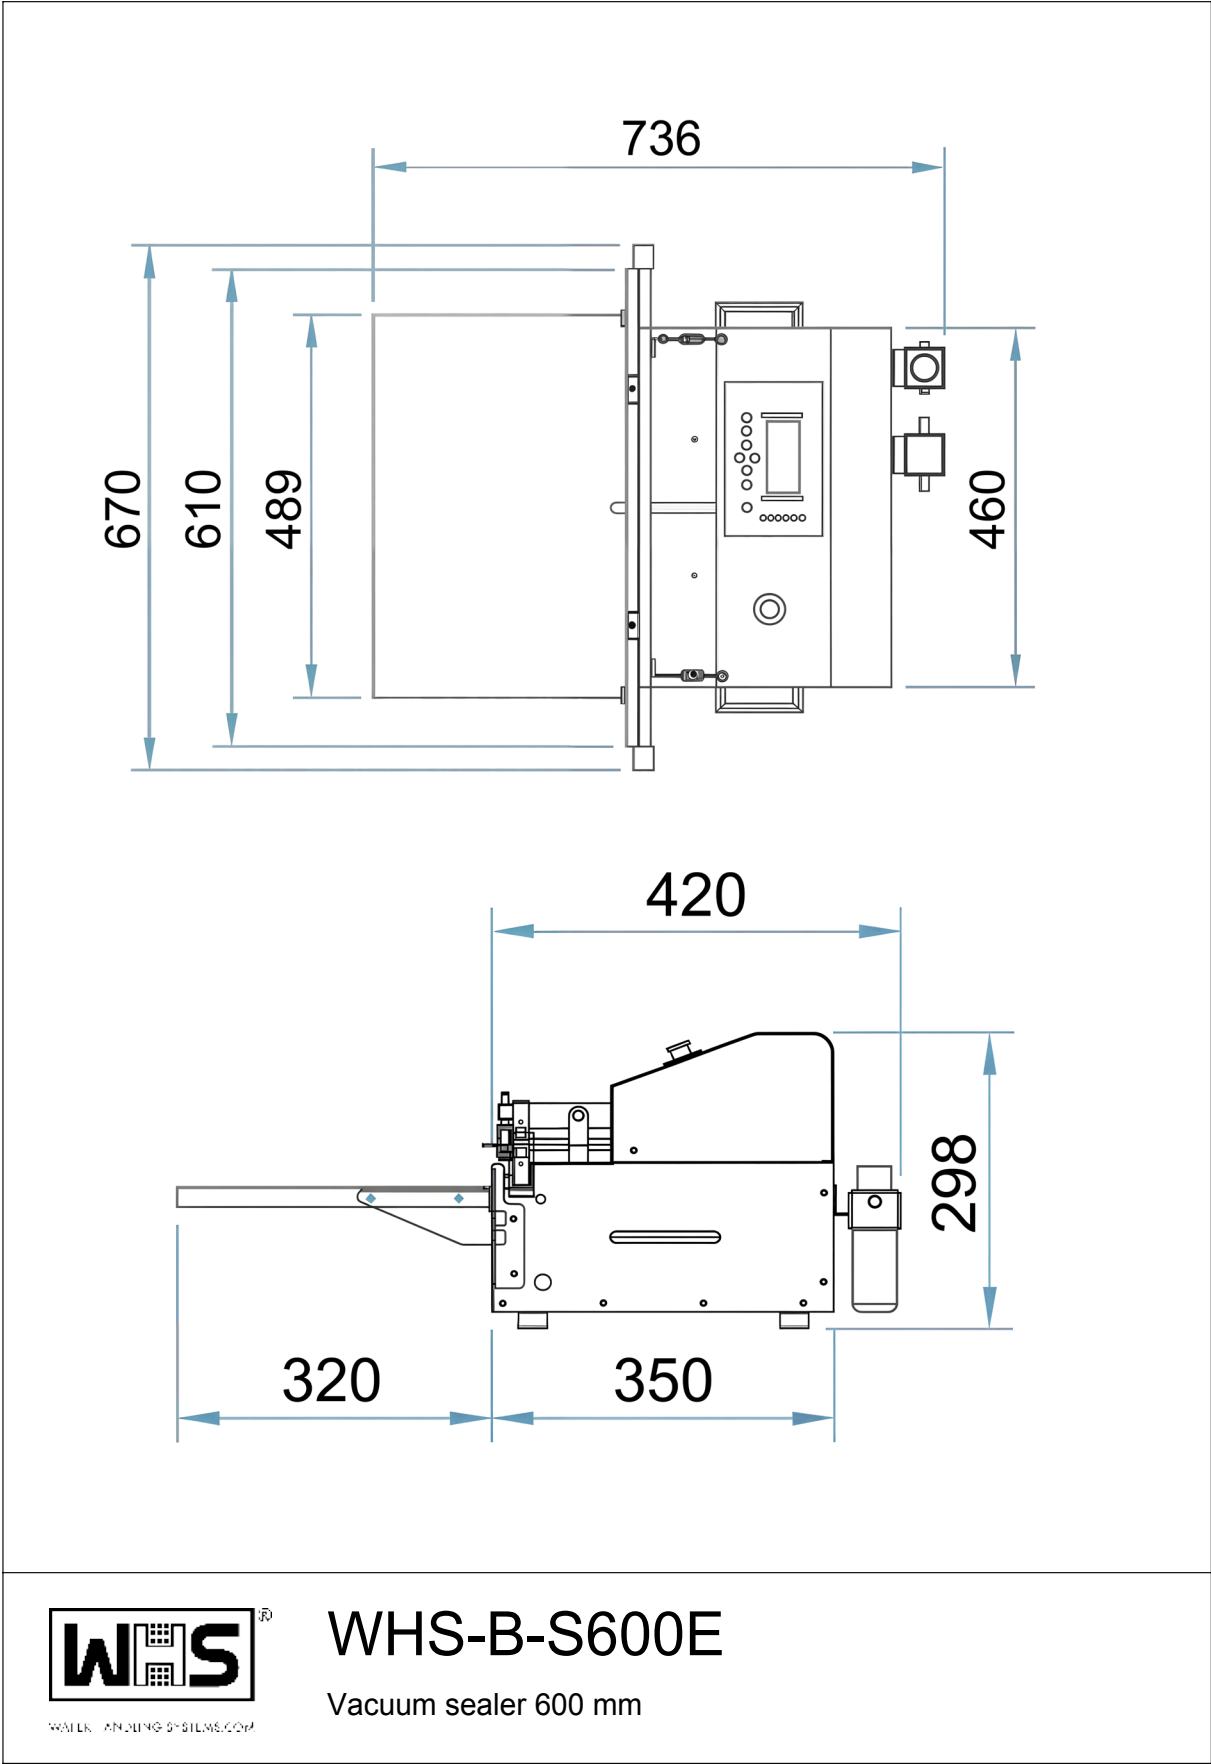

scale: 1:5 | entity: mm | This drawing is owned by WHS trademark and may not be copied, reproduced or shown to third parties without written permission.

REV032025